Paulmann

IP20

Info

www.paulmann.com

Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe
Germany
www.paulmann.com

Art.-Nr.: **788.80**
788.81
788.82

PLIR 06/22

788.80: 2m

1m x1

0.5m x2

x3

x2

x1

Li-Ion

x1 x1 x2

788.81: 2.4m

1.2m x1

0.6m x2

X3

x2

X1

Li-Ion

x1 x1 X2

788.82: 3.1m

1.5m x1

0.8m x2

X3

x2

x1

Li-Ion

x1 x1 x2

A

0.5m/0.6m/0.8m

1m/1.2m/1.5m

0.5m/0.6m/0.8m

16.7mm

OUT

GND
GND
DI
+5V

B

r≥30mm

a≥60°

r<30mm

a<60°

C

D

E





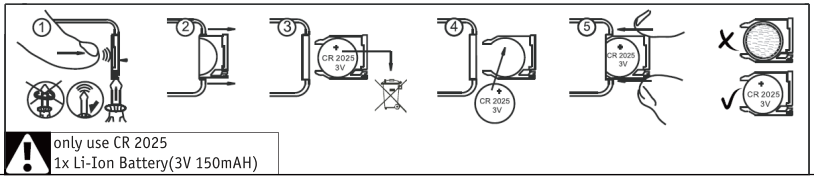

only use CR 2025
1x Li-Ion Battery(3V 150mAH)

F

Speed ↓	Brightness ↓
Speed ↑	Brightness ↑
Pause	16 Colors
ON/OFF	White

Smooth change between light red, red, light orange, orange, light yellow & yellow	Smooth change between light red, red, light orange & orange
Smooth change between light red & red	Smooth change between light yellow, yellow, light green & green
Smooth change between light green & green	Smooth change between white, light green, green & light blue
Smooth change between light green, green, light blue & blue	Smooth change between white, light blue & blue
Smooth change between light pink, pink, light purpel & purple	Light yellow, yellow, orange, light pink, pink & purple
Smooth change between light blue, blue, light pink, pink & purple	AUTO Cycle mode